



TPA-000010G20

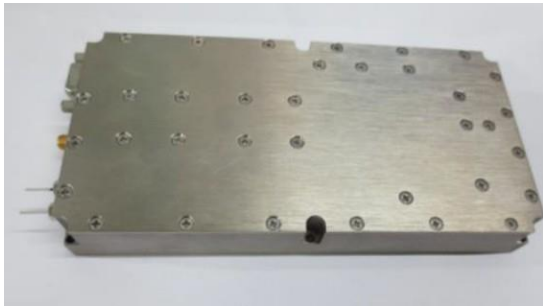

外形尺寸

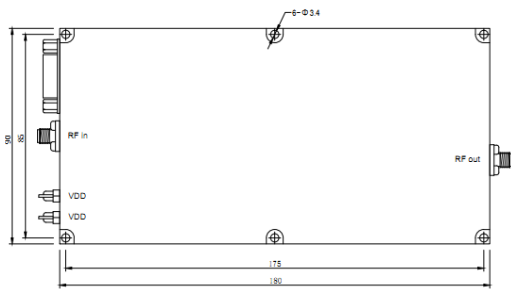

■ 频率范围	20-1000MHz
■ 增益	49.0dB
■ P1dB	41.0dBm typ
■ 输出功率Psat	43.0dBm

技术指标@25°C

频率范围	20-1000MHz
增益	49.0dB
增益平坦度	±2.0dB typ
P1dB	41.0dBm
输出功率Psat	43.0dBm
反向隔离	55.0 dB
OIP3	48.0dBm
输入端口驻波	2.0 :1
输出端口驻波	2.0 :1
电压	26.5V
电流	7.5A
工作温度	-20°C ~ 70°C
储存温度	-55°C ~ 100°C
直流电压	28V
射频入口功率	+8dBm max

订单描述

TPA- 000010G20  指标特性

测试曲线 (Temp @+25°C)

