



TPA-010500M02

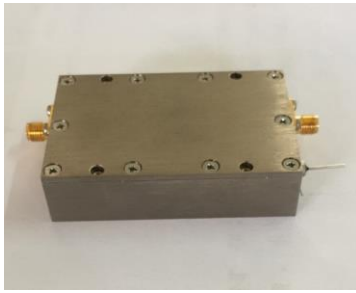

外形尺寸

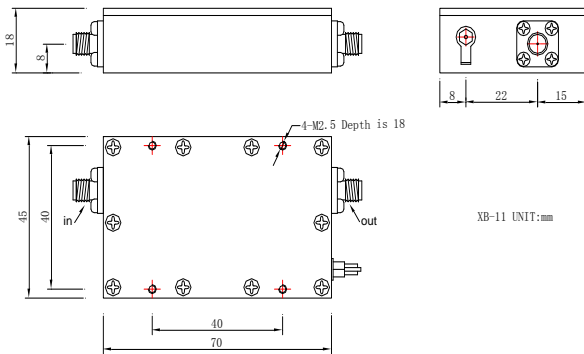

| | |
|--------|-------------|
| ■ 频率范围 | 10 - 500MHz |
| ■ 增益 | 20.0dB typ |
| ■ P1dB | 33dBm typ |

技术指标@25°C

| | |
|--------|---------------|
| 频率范围 | 10-500MHz |
| 增益 | 20.0dB typ |
| 增益平坦度 | ±1dB |
| P1dB | 33dBm typ |
| 输入驻波 | 2.0 :1 |
| 输出驻波 | 2.0 :1 |
| 电压 | 15.0 V |
| 电流 | 370mA |
| 工作温度 | -20°C ~ 70°C |
| 储存温度 | -55°C ~ 100°C |
| 极限电压 | 16V |
| 最大入口功率 | +18dBm |

测试曲线 (Temp @+25°C)

订单描述

TPA- 010500M02



指标特性

