


TLA-005120G30



外形尺寸

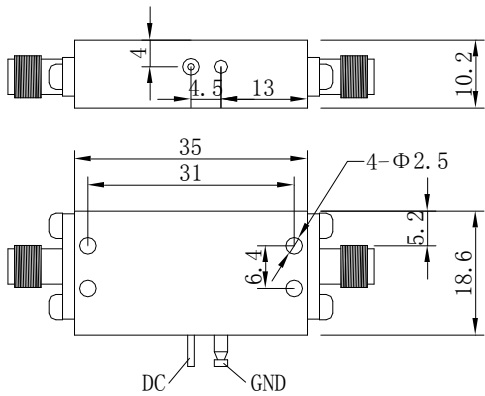

UNIT: mm XB-02A

测试曲线 (Temp @+25°C)

■ 频率范围	0.5 - 12GHz
■ 增益	30dB typ
■ P1dB	15dBm typ
■ 噪声系数	3.5dB typ

技术指标@25°C

频率范围	0.5-12GHz
增益	30dB typ
增益平坦度	±3dB typ
P1dB	15dBm typ
噪声系数	3.5dB
输入驻波	2.5 :1
输出驻波	2.5 :1
电压	12.0V
电流	200mA
操作温度	-20°C ~ 70°C
储藏温度	-55°C ~ 100°C
极限电压	13V
最大入口功率	-15dBm

订单描述

TLA-005120G30

指标特性

