


## TLA-010060G40



### 外形尺寸

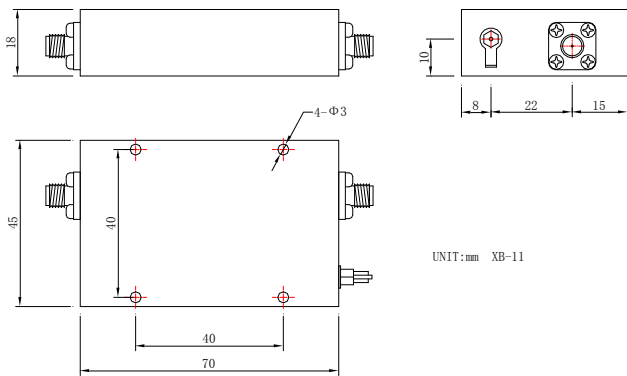

### 测试曲线 (Temp @+25°C)

■ 频率范围	1.0 - 6.0GHz
■ 增益	40.0dB typ
■ P1dB	20.0dBm typ
■ 噪声系数	3.0dB typ

### 技术指标@25°C

频率范围	1.0~6.0GHz
增益	40.0dB typ
增益平坦度	±2.0 dB typ
P1dB	20.0 dBm typ
OIP3	35.0dBm
反向隔离 (最大值)	50dB
噪声系数	3.0dB
输入驻波	2.0 :1
输出驻波	2.0 :1
电压	12.0V
电流	200.0 mA
操作温度	-20°C ~ 70°C
储藏温度	-55°C ~ 100°C
极限电压	15V
最大入口功率	-20 dBm

### 订单描述

TLA-010060G40

指标特性

