



TLA-052059G30



外形尺寸

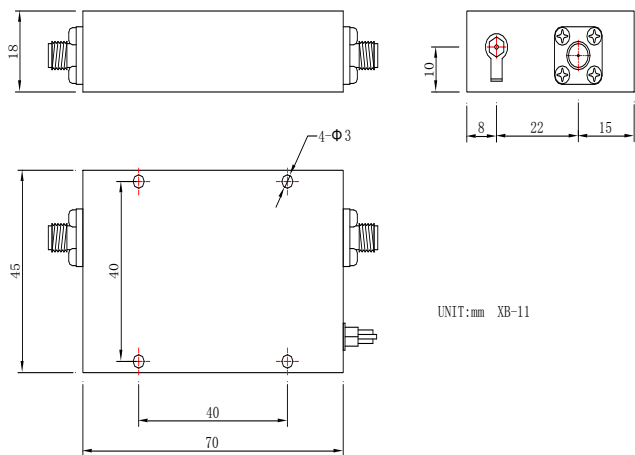

测试曲线 (Temp @+25°C)

■ 频率范围	5.2 - 5.9GHz
■ 增益	30dB typ
■ P1dB	17.0dBm typ
■ 噪声系数	1.8dB typ

技术指标@25°C

频率范围	5.2-5.9GHz
增益	30dB typ
增益平坦度	±1.5dB typ
噪声系数	1.8dB typ
P1dB	17.0dBm typ
输入驻波	1.5 :1
输出驻波	1.5 :1
电压	12.0V
电流	200mA
操作温度	-20 °C ~ 70 °C
储藏温度	-55 °C ~ 100 °C
极限电压	13V
最大入口功率	-20dBm

订单描述

TLA-052059G30



指标特性

