


## TLA-210240G28



### 外形尺寸

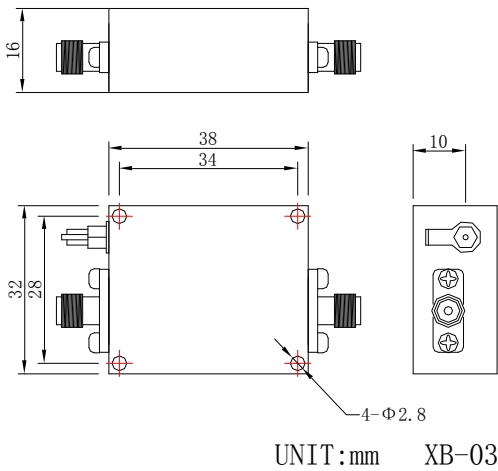

### 测试曲线 (Temp @+25°C)

■ 频率范围	21.0 - 24.0GHz
■ 增益	28.0dB typ
■ P1dB	19.0dBm typ

### 技术指标@25°C

频率范围	21.0-24.0GHz
增益	28.0dB typ
增益平坦度	±2.0dB typ
P1dB	19.0dBm typ
OIP3	30.0dBm
输入驻波	2.0 :1
输出驻波	2.0 :1
电压	12.0V
电流	200.0mA
操作温度	-20°C ~ 70°C
储藏温度	-55°C ~ 100°C
极限电压	15V
最大入口功率	-5dBm

### 订单描述

TLA- 210240G28  指标特性

