



HCH330JWP-3638K1-16

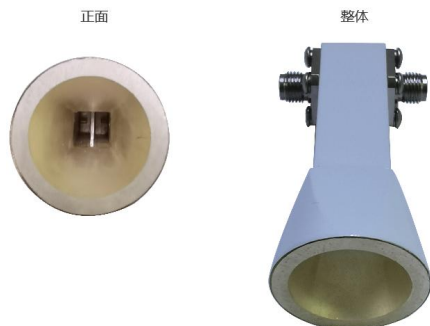

外形尺寸

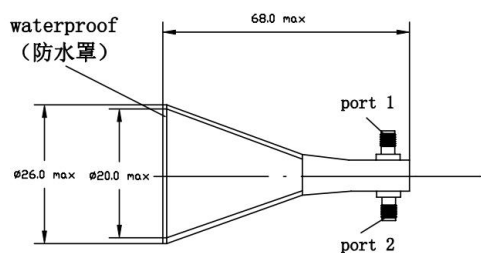

UNIT: mm (单位: mm)

■ 工作频率	36.0 - 38.0GHz
■ 驻波	1.85 max
■ 轴比	1.5 dB max

技术指标@25°C

工作频率	36.0 - 38.0GHz
增益	16.0 dB ± 0.5 dB @36.0GHz左旋极化
	16.0 dB ± 0.5 dB @36.0GHz右旋极化
	16.0 dB ± 0.5 dB @37.0GHz左旋极化
	16.0 dB ± 0.5 dB @37.0GHz右旋极化
	16.0 dB ± 0.5 dB @38.0GHz左旋极化
隔离度	20 dB min (端口1 - 端口2)
	26° (E Plane) and 26° (H Plane)@ 36.0GHz左旋极化
Beam W (-3dB波瓣宽度)	26° (E Plane) and 26° (H Plane)@ 36.0GHz右旋极化
	26° (E Plane) and 26° (H Plane)@ 37.0GHz左旋极化
	26° (E Plane) and 26° (H Plane)@ 37.0GHz右旋极化
	28° (E Plane) and 28° (H Plane)@ 38.0GHz左旋极化
	28° (E Plane) and 28° (H Plane)@ 38.0GHz右旋极化
接口	端口1 (左旋极化端口, 2.92(阴)) 端口2 (右旋极化端口, 2.92(阴))
材料	铜材料, 镀银
工作温度	-40~85°C

订单描述

HCH330JWP-3638K1-16

指标特性

